


ASSEMBLY AND INSTALLATION INSTRUCTIONS

T0302

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Hardware Package(inculded):




Mounting Plate (A)



Mounting Screw (B)




Wire Nut (C)



Headless screw (D)



Green Grounding Screw (E)




Lock Nut (F)



Ball Nut (G)



Rubber Pad (H)

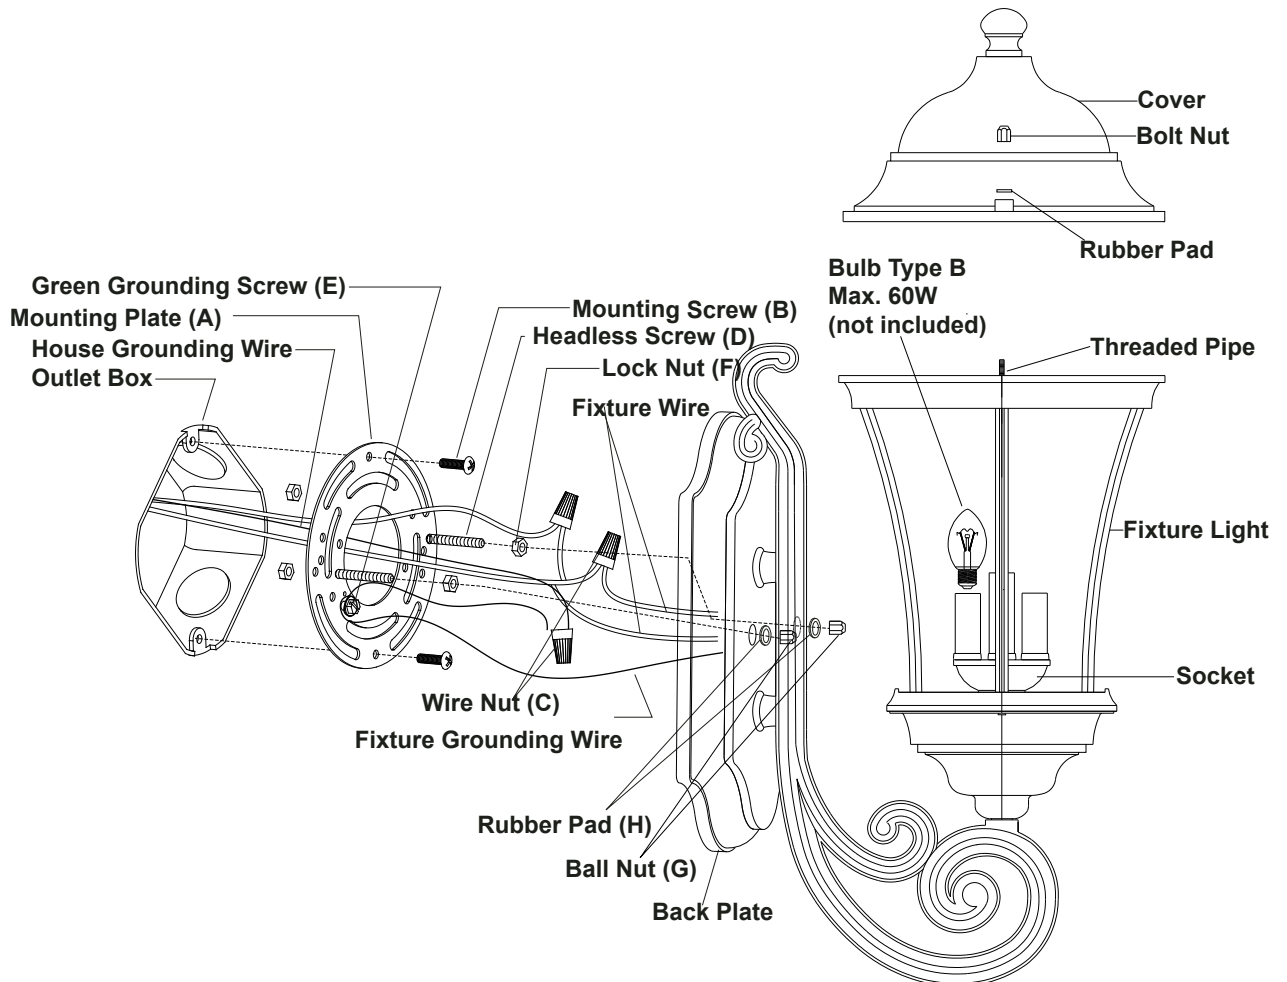

Installation Steps




Turn off the power at fuse or circuit box

1. Attach the headless screw to the mounting plate, then secure it with lock nuts.
2. Attach the mounting plate to the outlet box by using two mounting screws.
3. Pull out the outlet wires and house grounding wire from the outlet box. Make wire connections using the wire nuts:
 - The black wire from the fixture to the black wire from the power source.
 - The white wire from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting plate with the green grounding screw. Then connect it to the house grounding wire with a wire nut.Carefully put the wires back into the outlet box.
4. Attach the fixture light to the mounting plate by inserting the headless screw, then secure it with the ball nuts.
CAUTION: With silicone caulking compound, caulk completely around where the back plate meets with the wall surface to prevent water from seeping into the outlet box.
5. Install a bulb (not included). See relamping label on socket area or packaging for maximum allowed wattage.
6. Attach the cover onto the fixture light and tighten it with the rubber pads and bolt nuts.

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

Spare Parts List:

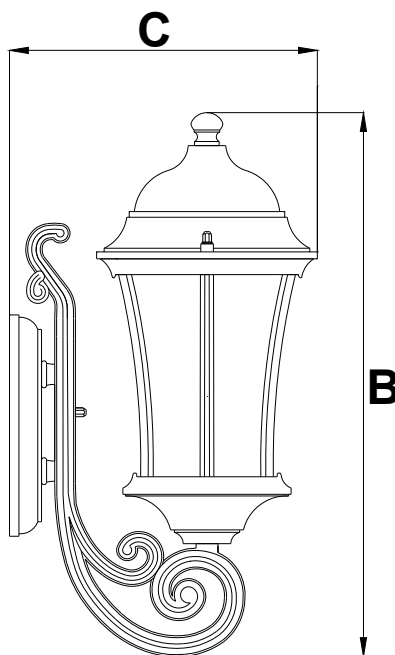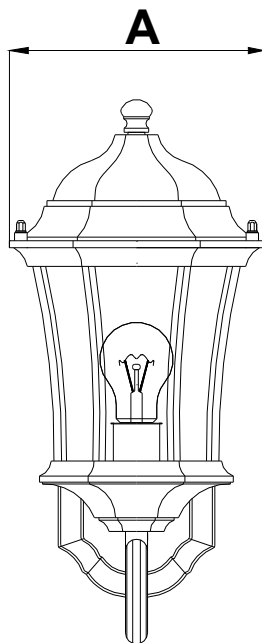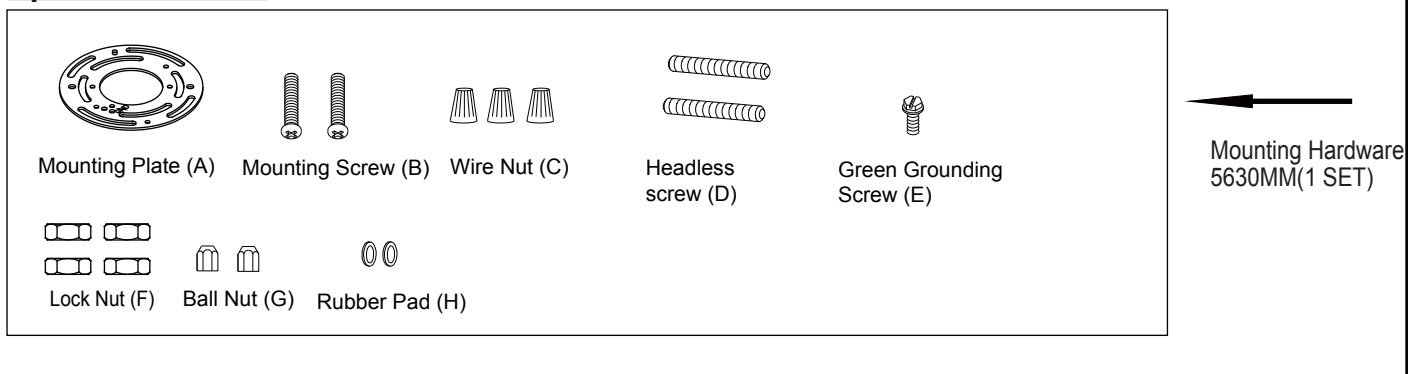

A: 12-3/4"
B: 26-3/4"
C: 13-1/2"