


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

W0319

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTES:** 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.

## Hardware Package (included):




Mounting plate (A)



Mounting Screw (B)



Wire Connector (C)



Fixture Mounting Screw (D)




Green Grounding Screw (E)



Lock Nut (F)



Ball Nut (G)

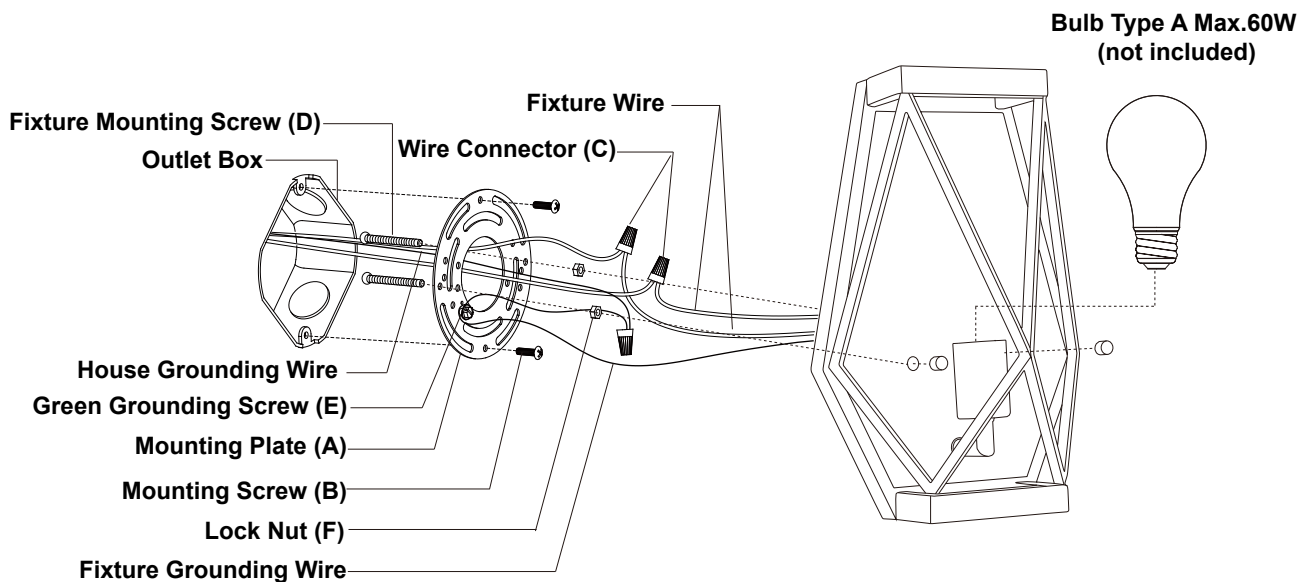

Turn off the power at fuse or circuit box

1. Thread two fixture mounting screws through the mounting plate, then secure them with two lock nuts (two on each side of the mounting plate). Adjust the length of the fixture mounting screws if necessary.

**Note:** Make sure that the fixture mounting screws are lined up horizontally, to ensure that the fixture will be level.


2. Attach the mounting plate to the outlet box by using two mounting screws.

3. Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections using the wire connectors:
  - Connect the black wire from the fixture to the black wire from the power source.
  - Connect the white wire from the fixture to the white wire from the power source.
  - Attach the fixture grounding wire to the mounting plate with the green grounding screw. connect it to the house grounding wire with a wire connector.Then Carefully put the wires back into the outlet box.
4. Attach the back plate to the mounting plate by inserting the fixture mounting screws, then secure it with two ball nuts.
5. Install a bulb (not included). See relamping label at socket area or packaging for maximum allowed wattage.

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

**Spare Parts List:**




Mounting plate (A)



Mounting Screw (B)



Wire Connector (C)



Fixture Mounting Screw (D)

Assembly Kit  
5982 MM (1SET)





Green Grounding Screw (E)



Lock Nut (F)



Ball Nut (G)

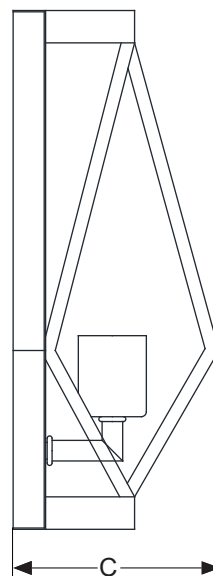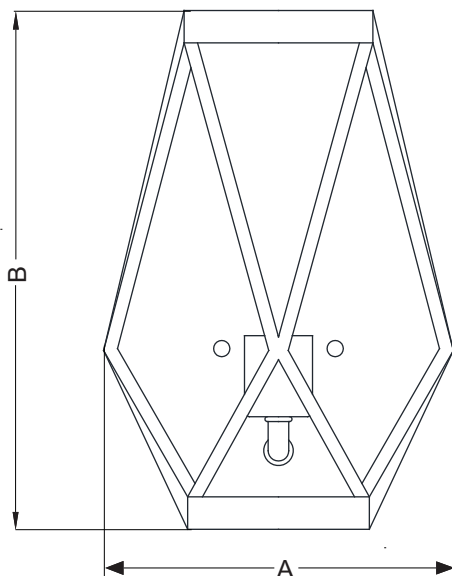

A: 8-1/2"

B: 12-5/8"

C: 5"